

### VISION TERMINAL WITH HANDSET

Keep an eye on everything around. With The Vision Terminal you can keep a sharp vigil without having to step out of your home. With an advanced Display Unit, it clearly displays your surroundings. Loaded with other features this unit is good enough to be called the Commando of your home. A Communication and monitoring unit in each house displays the building entrance, lobby, and flat entrance at all times. You can also have a **3 Layer of Video Security**.

The high density **4" B & W CRT or COLOUR TFT LCD** screen with Contrast and Brightness Control displays a crystal clear image of the visitor.

Further, intercom to all other extensions can be handled from the same unit.

So you are connected with everyone.

It also provides total security inside each individual apartment.



#### TECHNICAL SPECIFICATIONS

Camera	1/3" B/W or Colour CCD
Display Screen	4" B/W flat CRT or TFT Colour LCD
Resolution	500 TV Lines
Video Signal	75 Ohms, 1vp-p (CCIR to NTSC)
Power Voltage	DC 12V
Power Consumption	Standby mode 0.5W; Use or working mode 15W
Environment Temperature	-10° to +50°
Humidity	45% upto 95%
Mount Type	Wall Mount type
Dimension	220mm (h) x 198mm (w) x 65mm (d)

**VISION TERMINAL HANDS FREE**



**TECHNICAL SPECIFICATIONS**

Camera	1/3" Colour CCD
Display Screen	5.6" TFT Colour LCD
Resolution	500 TV Lines
Video Signal	75 Ohms, 1vp-p (CCIR to NTSC)
Power Voltage	DC 12V
Power Consumption	Standby mode 0.5W; Use or working mode 15W
Environment Temperature	-10° to +50°
Humidity	45% upto 95%
Mount Type	Wall Mount type
Dimension	220mm (h) x 210mm (w) x 40mm (d)

## 4 ZONE SECURITY SYSTEMS

The 4 zone security system is connected to sensors like Gas leakage, Fire detection, Magnetic switch, Panic button or PIR in each zone in the house. In case of emergency, the moment it detects a sensor activation signal, it transmits the respective flat number and zone indication along with loud alarm to the main security.

### Panic Switch

Pressing the panic button or code will notify a situation of panic and an emergency hooter will turn ON along with the number of the extension will be displayed on the digital display unit.

### Cable Tamper Alarm


In case any cable of sensor is cut, the unit gives an immediate indication of the flat number and activates a siren. Making your security tamper proof!

### Porch Unit

The Porch Unit has a call bell, either B & W or colour camera, a speaker and a microphone. This enables complete video security at the flat entrance.

### Unit Specifications


The Vision Terminal unit comes with a Dial pad, Panic Switch, Porch unit and the 4 Zone security system.

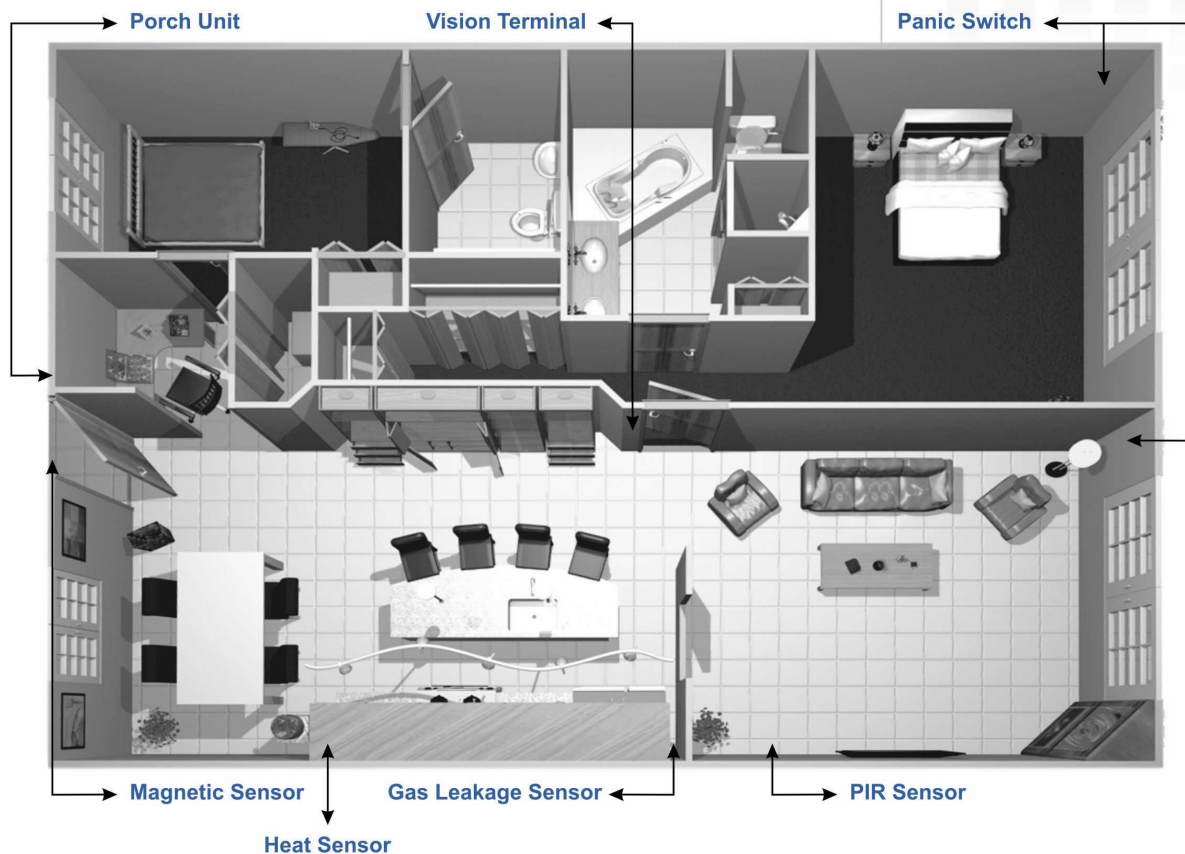

**PORCH UNIT**



**CT 200**

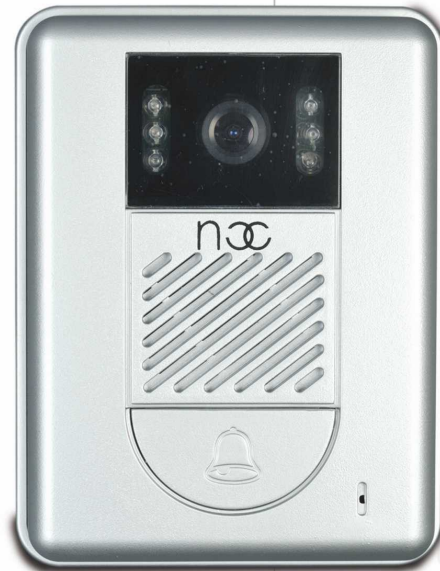

**CT 201**

**OUTDOOR UNIT SPECIFICATIONS**

	<b>CT200</b>	<b>CT201</b>
Camera	1/3" B/W or Colour CCD	1/3" B/W or Colour CCD
Resolution	380 TV Lines	380 TV Lines
Video Angle	75 Ohms, 1vp-p (CCIR or NTSC)	75 Ohms, 1vp-p (CCIR or NTSC)
View Angle	72" Wide angle camera	72" Wide angle camera
Min Illumination	0 Lux	0 Lux
Night Vision Light	6 Infrared LED	6 Infrared LED
Power Supply Voltage	DC 12V	DC 12V
Power Consumption	2W	2W
Environment Temperature	-10° to +50°	-10° to +50°
Humidity	45% upto 95%	45% upto 95%
Mount Type	Flush Type in 3 Switch Module	Wall Mount Type
Camera Angle	Adjustable ± 10 Degrees.	Fixed
Dimension	150mm (h) x 190mm (w) x 55mm (d)	128mm (h) x 98mm (w) x 55mm (d)