

The Digital Dreams Series units are RS-485 based devices designed to be mounted in electrical switchboards concealed in side the wall or similar enclosures. For ease of installation, they are also DIN rail mounted, measuring 1 DIN modules wide. Units can be programmed via a PC along with Gateway. The unit is consisting of Power Supply, CPU section and Input detection devices. The unit is self powered with single phase supply used locally. LED Indicators inside the unit shows the status of CPU.

The RS-485 Bus & inputs are electrically isolated.

AUTOMATION MODULE : DL 24I Input Module


The DL 24I is controller with,
24 input for buttons

Input : 24 isolated input with isolated dry contacts for command to individual load to be controlled.

Technical data :

Inputs :

- Supply Control Inputs – 5 V DC
- RS485 Network termination
- 24 input buttons for each load
- Dimensions : L 70 mm X H 120 mm X D 75 mm

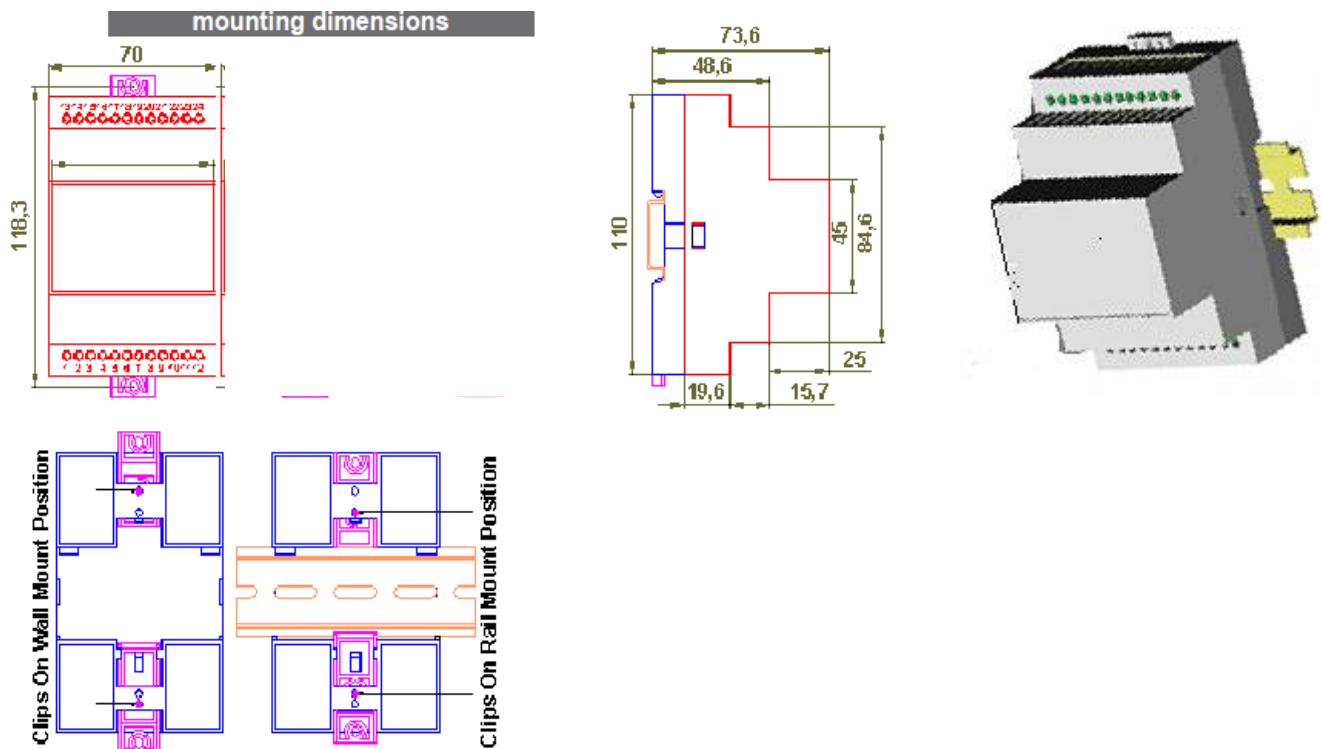

ncc

M/S. NCC Telecom Pvt. Ltd. - India.

info@ncc.co.in

www.ncc.co.in

Specifications subject to change without notice.

All rights reserved. Warranty is limited for our products only and not for other integrated items or failure due to integration.

for further information contact: